





TACFLEX METAL FLEXIBLE CONDUITS



- Galvanised & tin plate steel options
- Resistance against compression
- Long lasting corrosion
- Permanent operational temp. up to 220 °C

FLEXIBLE SPIRAL CONDUITS METAL

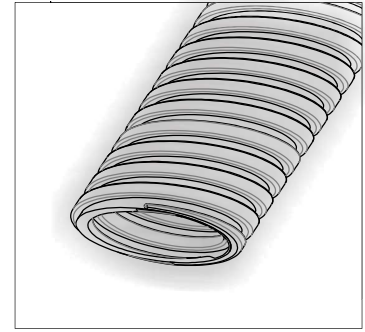

METAL SİRAL BORULAR

- Hammaddesi : Galvaniz & Kalay kaplı sac
Sürekli ısıya direnci : +220 °C'ye kadar

PRODUCT RANGE OVERVIEW

Code	d mm.	d1 mm.	Roll Length m.
OCS 7	7,5	10,5	50
OCS 9	9	12	50
OCS 11	11	14	50
OCS 13	13	15,5	50
OCS 14	14	17	50
OCS 16	16	19	50
OCS 18	18	21	50
OCS 21	21	24	50
OCS 26	26	30	25
OCS 29	29	33	25
OCS 32	32	36	25
OCS 35	35	39	25
OCS 37	37	41	25
OCS 40	40	44	25
OCS 42	42	46	25
OCS 45	45	49	25
OCS 51	51	55	25
OCS 55	55	59	25
OCS 60	60	64	25
OCS 63	63	67	25
OCS 75	75	80	25