


# C

## ENCLOSURES IP40 – FLUSH MOUNTING



Name	U 8 C	U 12 C	U 24 C	U 36 C
Type	IP 40 □ In-63A	IP 40 □ In-63A	IP 40 □ In-63A	IP 40 □ In-63A
Dimensions	211 x 232 x 99	283 x 232 x 106	283 x 357 x 106	283 x 482 x 106
Number of modules	8	12	24	36
PE, N terminal	2 x 8	2 x 10	2 x 13	2 x 15

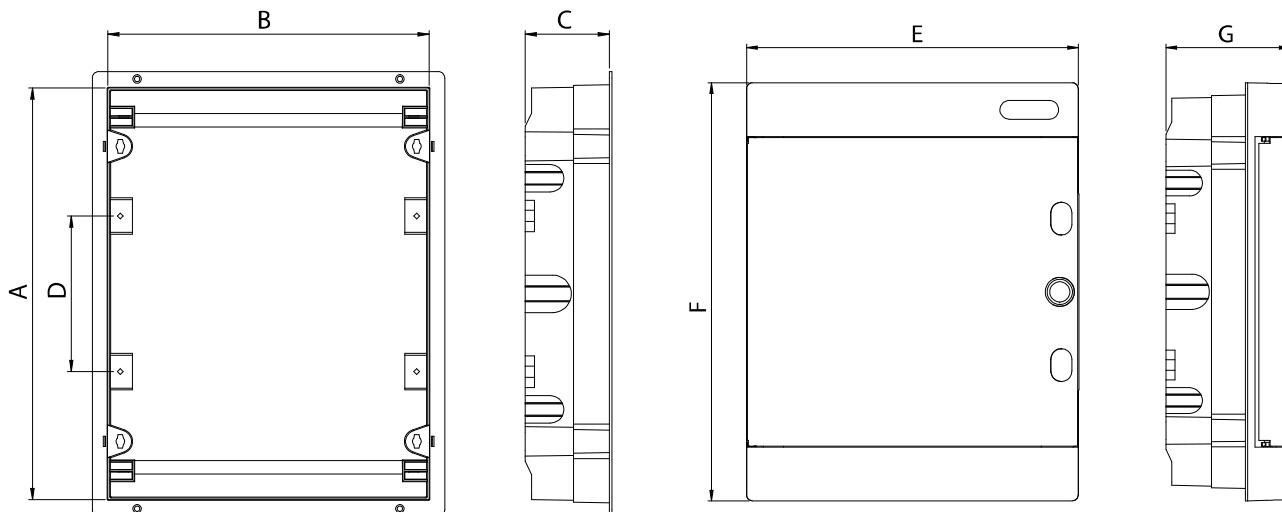

	A	B	C	D	E	F	G
U8C	212 mm	201 mm	68 mm	-	211 mm	232 mm	99 mm
U12C	212 mm	273 mm	68 mm	-	283 mm	232 mm	106 mm
U18C	212 mm	373 mm	68 mm	-	392 mm	232 mm	106 mm
U24C	336 mm	273 mm	68 mm	125 mm	283 mm	357 mm	106 mm
U2x18C	336 mm	373 mm	68 mm	125 mm	392 mm	357 mm	106 mm
U36C	460 mm	273 mm	68 mm	125 mm	283 mm	482 mm	106 mm
U3x18C	502 mm	373 mm	68 mm	125 mm	392 mm	522 mm	106 mm

Material	Acrylonitrile butadiene styrene
Color	RAL 9003
Door	Acrylonitrile butadiene styrene
Color	Transparent & White
Glow wire test	650°C
Terminal holder	Self extinguish material
Glow wire test	960°C
Temperature	-25°C / +60°C
Rated voltage	AC 400V
According to	IEC 60670
Halogen free	Yes

Enclosures are completely assembled with all necessary parts, such as:

- DIN rail
- Insulated terminals, neutral and ground
- Covers for free space
- Needed installation accessories
- Manual instruction

\* Additional terminal upon request



Name	U 18 C	U 2x18 C	U 3x18 C
Type	IP 40 □ In-63A	IP 40 □ In-63A	IP 40 □ In-63A
Dimensions	392 x 232 x 106	392 x 357 x 106	392 x 522 x 106
Number of modules	18	36	54
PE, N terminal	2 x 13	2 x 15	2 x 25