


Product: Fixing Saddles Type SUPER T
Reference: ST 16 | ST20 | ST25 | ST32 | ST40

	A	ØB	C	D	E	F	IEC
ST 16	27,3	15,4	10,9	26,5	12,2	15	16
ST 20	30	19,5	11,2	30,5	14,6	15	20
ST 25	35,3	24,7	10,9	35,3	19,1	15	25
ST 32	43	31,9	10,9	41	24,9	15	32
ST 40	53,5	39	11,4	48,4	31,4	15	40

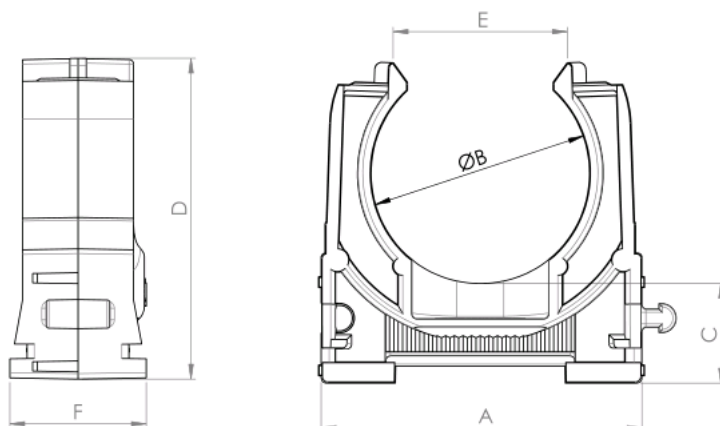

PRODUCT CHARACTERISTICS

Type of Material	Thermoplastic	Color Available	Dark Grey RAL 7037, Light Grey RAL 7035, Cream, Black, White
Fixing support	Quick mounting dowel PSBT, Quick dowel PST, Clip, Gluing Base and M6 Plug	Electrical properties	Electrical insulation
Aplication	Pressure	Chemical properties	Resistant to acid & alkaline solutions Resistance limited to solvents UV Resistant
Self-extinguishing	650 °C	Others	Low smoke content Halogen free
Operating temperature	-15°C +90°C		

APPLICABLE STANDARDS

EN 61386-25 - Conduit systems for cable management - Part 25: Particular requirements - Conduit fixing devices