



# 2018 PRODUCT RELEASES

...and more to come soon.

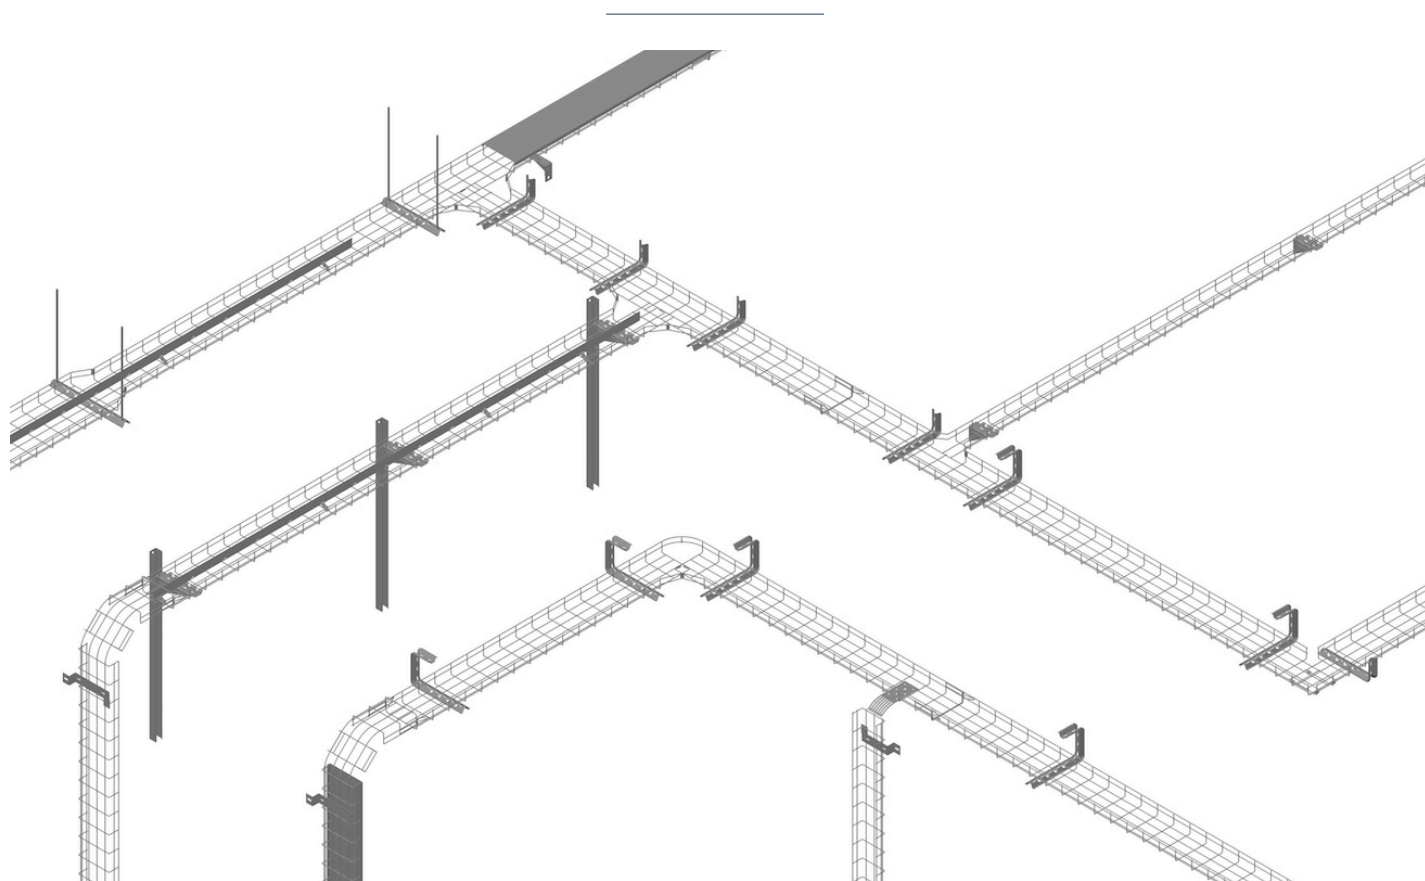

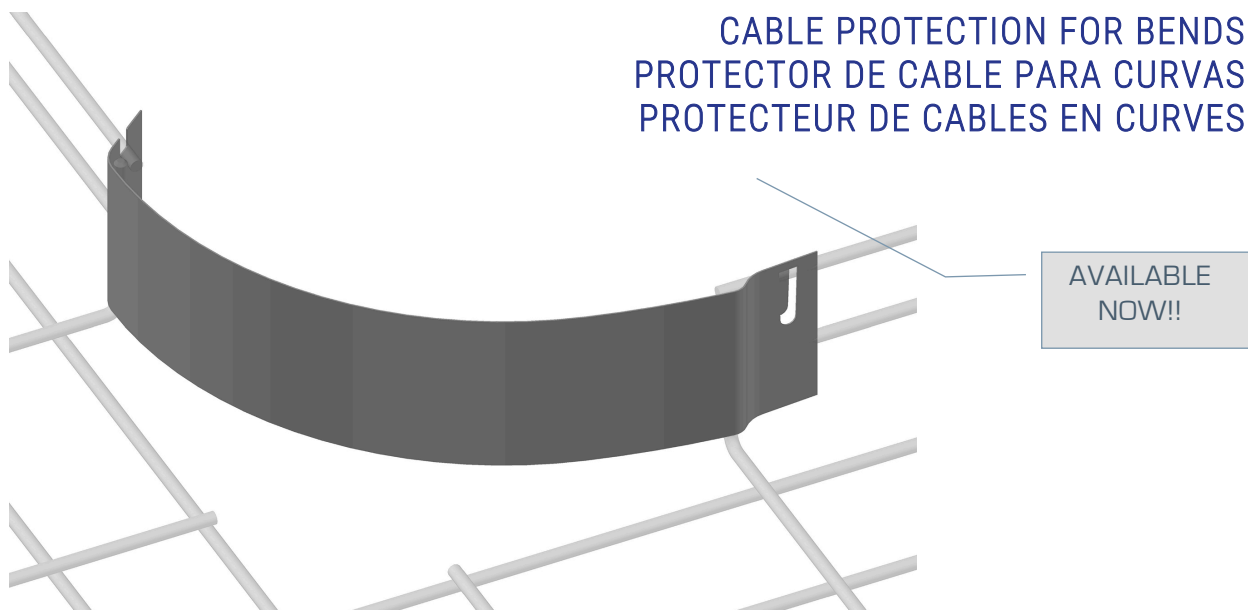


| Ref. Code     | Width (mm) | Length (mm) | Thickness (mm) | Weight (Kg/unit) | Package (units) |
|---------------|------------|-------------|----------------|------------------|-----------------|
| <b>CPB-SG</b> | 55         | 290         | 0.8            | 0,100            | 10              |
| <b>CPB-IN</b> | 55         | 290         | 0.8            | 0,100            | 10              |

**FEATURED ADVANTAGES:**

- Keep cables protected on tray bends.
- Easy to bend and to adjust to any angle.
- Set it on the inner side of the cable tray bend.


**METAL FAST CLAMP -STAINLESS STEEL 304**  
**BRIDA METÁLICA DE ACERO INOXIDABLE 304**  
**BRIDE METALLIQUE INOX 304**

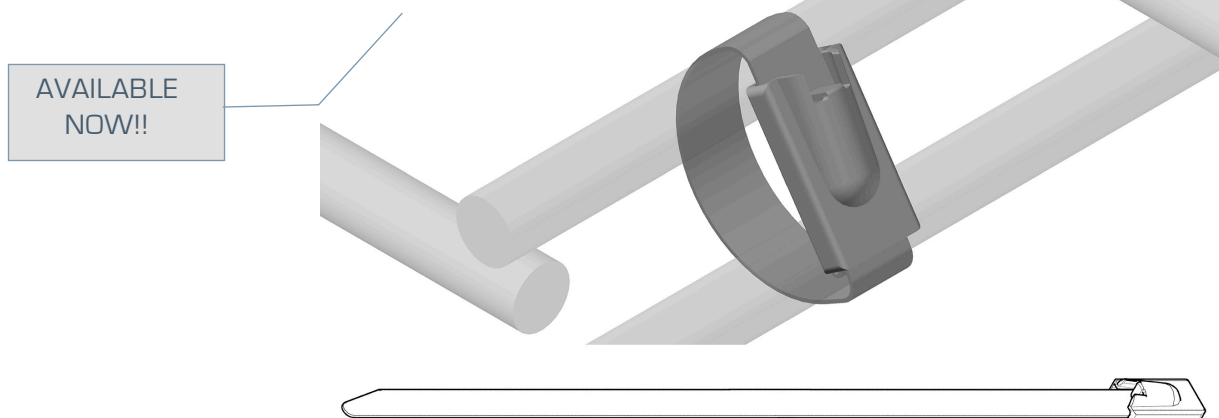

| Ref. Code | Length (mm) | Width (mm) | Weight (Kg/unit) | Package (units) |
|-----------|-------------|------------|------------------|-----------------|
| MFCIN     | 130         | 4,5        | 0,01             | 100             |

**FEATURES ADVANTAGES:**

- Stainless Steel AISI-304
- The most convenient way to form angles and bends on stainless steel wire mesh cable trays.
- **Special for FOOD & PHARMA INDUSTRY PLANTS.**
  - High Hygienic - Do not retain dust or dirt.
  - High Resistance.
  - Easy to install.

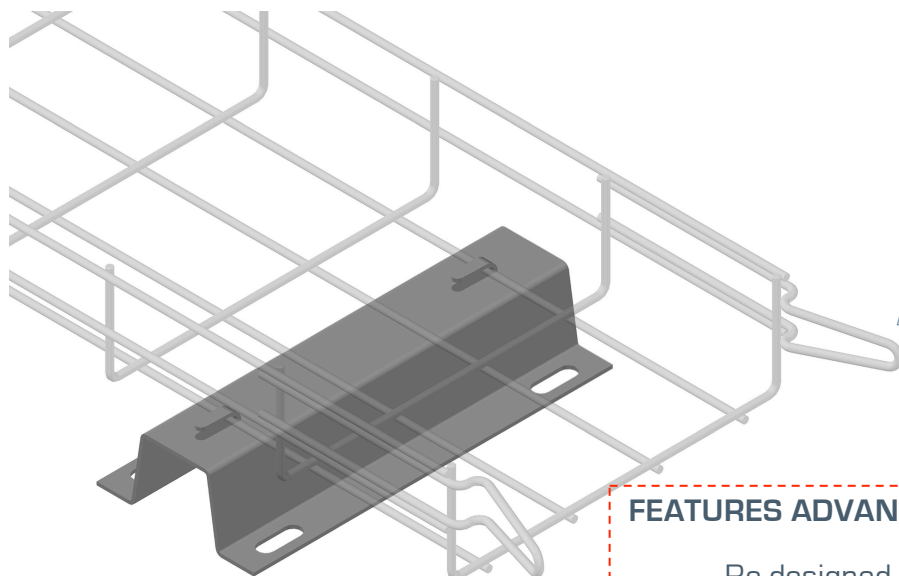


**GROUND SUPPORT  
SOPORTE A SUELO  
SUPPORT AU SOL**

**AVAILABLE  
NOW!!**

**FEATURES ADVANTAGES:**

- Re-designed for More Widths and Higher Load Resistance!
- Available on HDG (Hot Dip galvanized) and IN (Stainless Steel)
- -Distance to floor 50 mm


| Ref. Code | Height (mm) | Width (mm) | Length (mm) | Thickness (mm) | Weight (Kg/unit) | Package (units) |
|-----------|-------------|------------|-------------|----------------|------------------|-----------------|
| SAS100SG  | 40          | 92         | 110         | 2              | 0.254            | 4               |
| SAS150SG  | 40          | 92         | 160         | 2              | 0.375            | 4               |
| SAS200SG  | 40          | 92         | 210         | 2              | 0.496            | 4               |
| SAS300SG  | 40          | 92         | 310         | 2              | 0.739            | 4               |
| SAS400SG  | 40          | 92         | 410         | 2              | 0.981            | 4               |
| SAS500SG  | 40          | 92         | 510         | 2              | 1.223            | 4               |
| SAS600SG  | 40          | 92         | 610         | 2              | 1.465            | 4               |

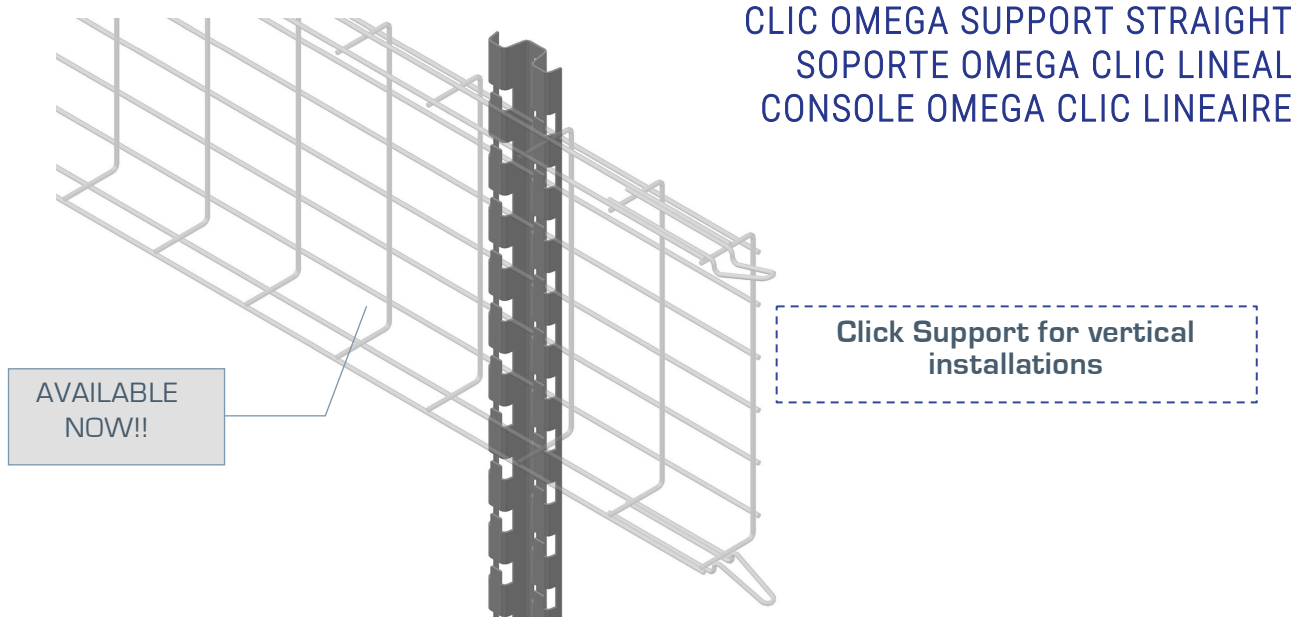

| Ref. Code | Length (mm) | Thickness (mm) | Weight (Kg/unit) | Package (units) |
|-----------|-------------|----------------|------------------|-----------------|
| SOAL1SG   | 1000        | 2              | 1,513            | 4               |
| SOAL2SG   | 2000        | 2              | 3,027            | 4               |
| SOAL3SG   | 2990        | 2              | 4,540            | 4               |
| SOAL1HDG  | 1000        | 2              | 1,677            | 4               |
| SOAL2HDG  | 2000        | 2              | 3,353            | 4               |
| SOAL3HDG  | 2990        | 2              | 5,030            | 4               |
| SOAL1IN   | 1000        | 2              | 1,513            | 4               |
| SOAL2IN   | 2000        | 2              | 3,027            | 4               |
| SOAL3IN   | 2990        | 2              | 4,540            | 4               |

#### FEATURES ADVANTAGES:

- Available in 1, 2 and 3 metres lengths.
- Suitable for working loads of widest EASYCONNECT trays.
- EASY to install.

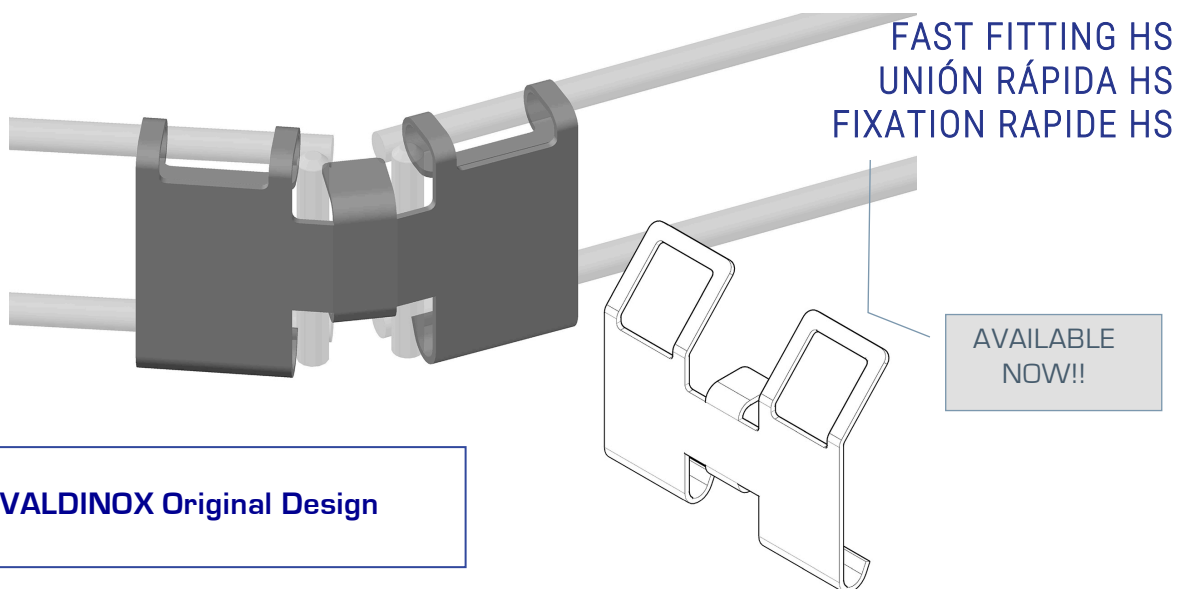


| Ref. Code | Height (mm) | Width (mm) | Thickness (mm) | Weight (Kg/unit) | Package (units) |
|-----------|-------------|------------|----------------|------------------|-----------------|
| UREZ      | 50          | 60         | 0,8            | 0,01             | 25              |
| URSG      | 50          | 60         | 0,8            | 0,01             | 25              |
| URZF      | 50          | 60         | 0,8            | 0,01             | 25              |
| URIN      | 50          | 60         | 0,8            | 0,01             | 25              |

#### FEATURES ADVANTAGES:

- QUICK forming curves and angles.
- EASY to install.
- All Coatings available.
- Perfect for small widths of EC60 series

## CONDUIT SUPPORT SOPORTE TUBOS SUPPORT CONDUITS

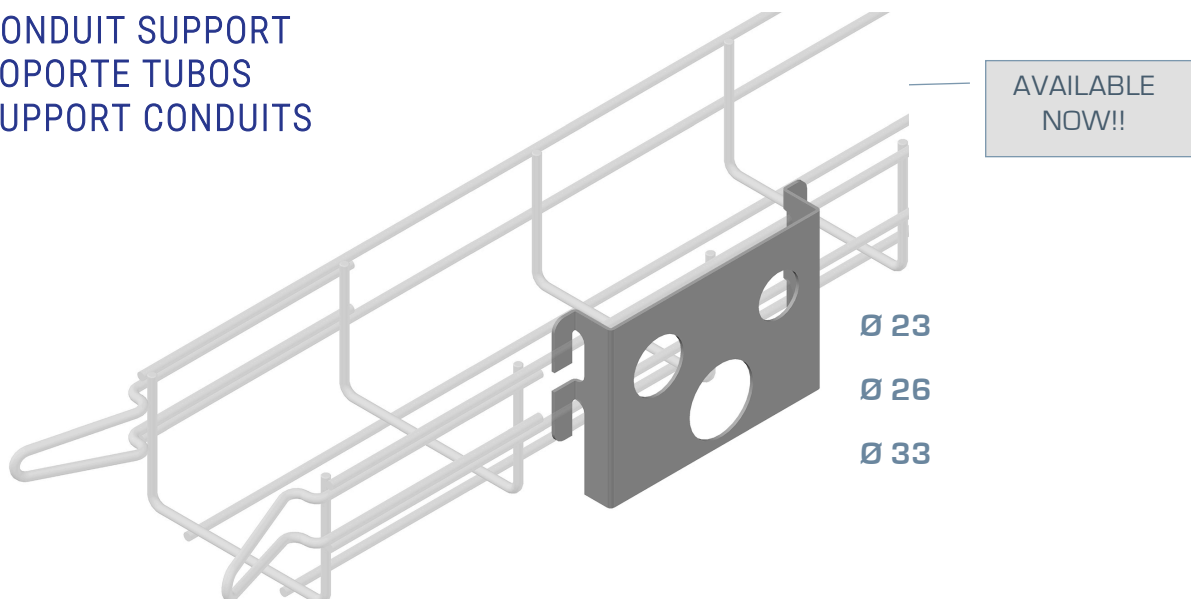

| Ref. Code   | Width (mm) | Length (mm) | Thickness (mm) | Weight (Kg/unit) | Package (units) |
|-------------|------------|-------------|----------------|------------------|-----------------|
| <b>STSG</b> | 80         | 110         | 1,5            | 0.118            | 20              |
| <b>STZF</b> | 80         | 110         | 1,5            | 0.118            | 20              |
| <b>STIN</b> | 80         | 110         | 1,5            | 0.118            | 20              |

## SILICONE END CAP HEAT RESISTANT 316°C TAPÓN DE SILICONA TERMORRESISTENTE 316°C BOUCHON DE SILICONE 3,8 THERMO RÉSISTANT 316°C




| Ref. Code     | Length (mm) | Thickness (mm) | Package (units) |
|---------------|-------------|----------------|-----------------|
| <b>SEC3.8</b> | 16          | 3,8            | 100             |
| <b>SEC4.4</b> | 16          | 4,4            | 100             |
| <b>STIN</b>   |             |                | 100             |

....COMING SOON.

ADJUSTABLE GRIPPER FOR SUSPENSION  
AGARRADERA AJUSTABLE PARA SUSPENSIÓN  
SYSTÈME RÉGLABLE POUR SUSPENSION

| Ref. Code | Wire range (mm) | SWL (Kg) | Package (units) |
|-----------|-----------------|----------|-----------------|
| WRG1      | 1,5 - 2,0       | 56       | 20              |
| WRG2      | 2,4 - 3,2       | 113      | 20              |
| WRG3      | 4,0 - 5,0       | 300      | 20              |

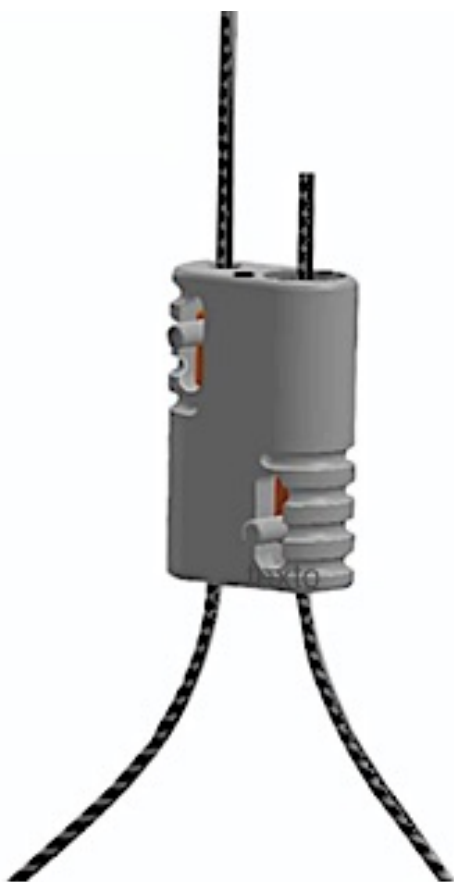

Send us your comments - Envíanos tus  
comentarios. - Envoyez nous vos opinions:  
[g.becedoniz@valdinox.com](mailto:g.becedoniz@valdinox.com)

VALDINOX, THE CABLE TRAY COMPANY  
- EXPERTS ON WIRE MESH CABLE TRAY -  
- COMMITTED TO EXCELLENCE -