



Termoplástico
Termoplastico
Thermoplastic
Thermoplastique



-15°C
+90°C



Agrupável
Apilable
Stackable
Empilable




Aceita Bucha
Acepta Taco
Receives Dowel
Receus Cheville




Aplicação por pressão
Aplicación presión
Pressure application
Application à pression



Para usar com Cabos
Para uso con Cables
To use on Cables
Utilizer avec des câbles



Vertical



Horizontal

710-15 ref.

710-30 ref.



Série 300 ref.




SCAN + INFO

710-15 ref.

710-30 ref.




Porta-cabos de fixação vertical ou lateral
Puerta cables de fijación vertical o lateral
Cable fixing capable of vertical or lateral fixation
Attache à cable du fixation latérale ou verticale



Furo de Ø 6mm
Agujero de Ø 6mm
6mm hole
Trou 6mm



-25°C
+90°C



kg



Carga Máxima
Carga Máxima
Maximum Load
Charge Maximale

Ref.	Dim. (mm)
710-15	80x52x26
710-30	119x59x26

Série 300 ref.


Abraçadeiras aperto mecânico (parafuso metálico)
Abrazaderas con apertura mecánica (tornillo metálico)
Mechanical Aperture Saddles (metallic screws)
Attache pour câbles mécanique (vis métallique)





Parafusos de aço zincado
Tornillos de acero zincado
Stell zined plated Screws
Vis en Acier



Preto | Creme
Negro | Crema
Black | Cream
Noir | Crème

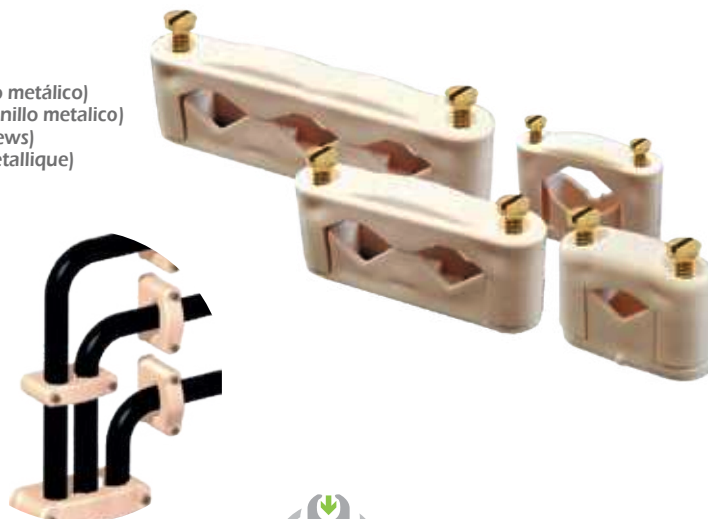

Fixação com:
Fijacion con:
Mounting with
Fixation avec:



Ref.	Ø cab. (mm)
305	6 - 14
306	10 - 18
307	15 - 28
308	30 - 40
309	40 - 63
305/2	2 x 7 - 14
306/2	2 x 10 - 18
305/3	3 x 7 - 14
306/3	3 x 10 - 18

